

AM-521 VARIABLE 2-SPEED AUTOMATIC SLIDE MOUNTING SYSTEM

Precision Engineered for Speed, Performance & Reliability


The AM-521 Automatic Slide Mounting System meets the demands of high volume slide production with speed and maximum film safety.

The variable 2-speed motor gives you the option to mount at a low speed of 50-75 slides per minute for customer film and a high speed of 100-170 slides per minute for slide dupe jobs.

Additional versatility comes by adding various options such as sleeving or imprinting—all designed to work seamlessly with the AM-521 mounter.

Pakon's unique one-piece mount is the primary reason the AM-521 mounters are so uncomplicated and so efficient! Mounter simplicity keeps maintenance expense to a minimum—assuring long life, ease in servicing and high productivity.

AM-521 Mounter eliminates the need for electronic controls and expensive compressed air systems. Hence, routine maintenance is minimal and can be performed in the lab with common hand tools. The mounter can be dedicated to mounts that are either 1.3mm or 1.8mm in thickness, and provides pin-registered mounting as a standard feature.

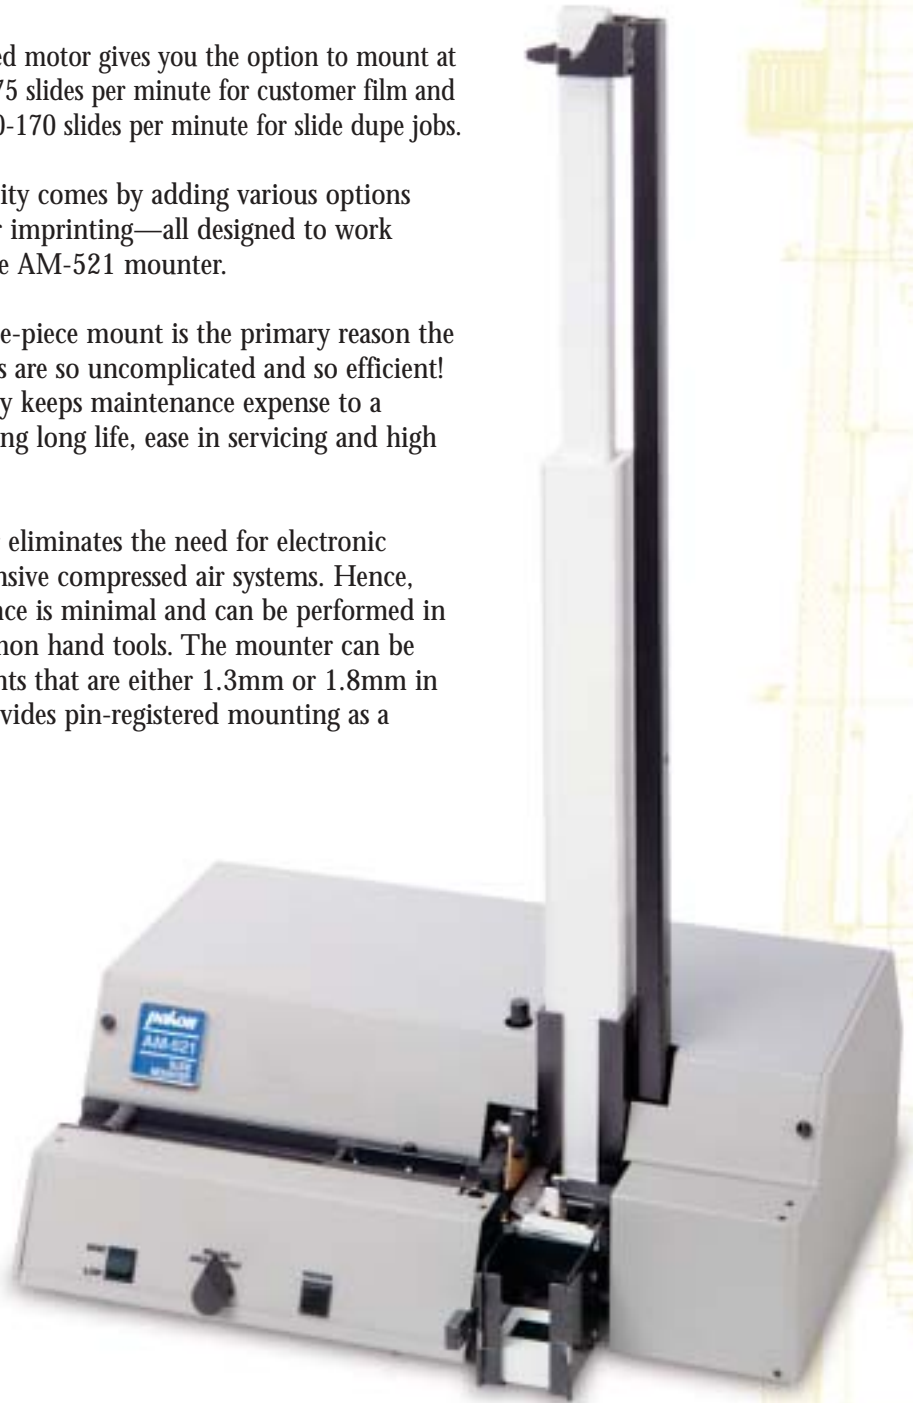

pakon
Simply the Best.

8 0 0 - 3 6 7 - 9 9 9 5
1 3 2 8 N O R T H
F U L T O N A V E N U E
E V A N S V I L L E , I N
U . S . A . 4 7 7 1 0
8 1 2 - 4 2 4 - 1 5 9 0
F A X 8 1 2 - 4 2 4 - 1 6 8 4
w w w . p a k o n . c o m

PROVIDING LABS WITH COMPLETE IN-LINE MOUNTING SYSTEMS.

Optional add-on multi-line imprinting and sleeving—as shown here—enhance the overall versatility, productivity and flexibility of the AM-521.



AM-521 Features

- **Variable 2-speed** gives you the option to mount at low speed for customer film and a high speed for slide dupe jobs.
- **Mount supply switch** stops the mounter automatically when the supply of mounts runs low.
- **Film Flap** provides remedial flattening of curly film to eliminate film scratching.
- **Film drive safety interlock** stops the mounter mid-cycle if film advance is obstructed
- **Quiet operation** means less lab noise and operator fatigue.
- **Footswitch**
- **Mount supply arbors** holds 500 slide mounts.
- **Splice eject** deflects film out of the mounting area.
- **Illuminated film track**
- **Frame adjustment control**



AM-521 Mounter

AM-521 Specifications*

- Width:** 20.25" (51.4 cm)
29" (73.7 cm) with film supply
- Depth:** 15.5" (39.4 cm)
- Height:** 8.25" (21 cm)
35" (89 cm) with arbor support
- Net Weight:** 48 pounds (21.8 kg)
- Shipping Weight:** 54 pounds (24.5 kg)
- Power Requirements:** 115 VAC, 50/60 Hz
Fused for 2 amps
- Variable 2-Speed:** Low: 50-75 slides per min.
High: 100-170 slides per minute
- Mounts:** Pakon plastic—1.3 mm or 1.8mm thick, Standard No-Float Mount, Pro Mount, Pin-Lock Mount, Transparency Proof Mount
- Accessories:** 400 foot film supply, Imprinters, SS-100 Slide Sleever

*Specifications subject to change without notice.

pakon[®]